

Actuator Type 1, 90° - Technical Data, Summary



WireMatic actuators are pneumatic quarter turn actuators based on double rack and pinion design. The Type 1 actuator is also available in half turn execution (180°).

The Type 1 90° actuator is generally recommended to “small” Butterfly valves, Ball valves and Plug valves.

Data for Type 1 actuators with movement 0 - 90°

Material, standard (outside)

- Anodized Aluminum, Black
- CNI, Chemically Nickel/PTFE Impregnated for increased corrosion resistance
- Other treatments upon request

Movement

- 0° to 90°

End Stop Adjustment

Single End Stop Adjustment, Open position, located in the End Cap

Over travel

- Open: 3°
- Closed: 0° to 0.5°
- Note! If the actuator is assembled Fail Open (FO), the over travel will be the opposite, ie.
Open: 0° to 0.5°
Closed: 3°

Sizes

- 2, 4, 8, 12, 20, 35, 250 and 400

Torque

Linear torque, ie a Double Acting (DA) Actuator has the same rack power over the entire movement

Torque Output, Double Acting (DA) at 6 bar/80 psi

- 20 to 374 Nm and 2648 to 4803 Nm
- 166 to 3055 in.lbs and 21480 to 38971 in.lbs

Torque Output, Spring Return (SR) at 6 bar/80 psi

- 7 to 133 Nm and 1212 to 1888 Nm
- 59 to 1076 in.lbs and 10728 to 16711 in.lbs

Actuator Type 1, 90° - Technical Data, Summary

Operating Pressure

- DA: 2-10 bar / 30-145 psi
- SR: 2-10 bar / 30-145 psi. When the Actuators will be used at Operating pressures below 5.5 bar / 79.8 psi, we recommend that you contact your TT distributor.

Drive Medium

- Standard: Air (Dry or Lubricated) or inert gases (non-dangerous fluids)
- Options (require rebuilding): Oxygen, Hydraulic Oil or Water

Temperature Range, Standard execution (Buna Nitrile, NBR O-seals)

- - 30° to + 80°C
- - 22° to + 175°F

Temperature Range, High temperature (Viton O-seals)

- - 20° to + 140°C
- - 4° to + 284°F

Temperature Range, Low temperature

- -45° to +60°C
- -49° to +140°F

Temperature Range, Arctic temperature

- -50° to +60°C
- -58° to +140°F

Stroke, Double Acting (DA)

Looking at the front of the Actuator, Port A is on the left side and Port B is on the right

Port A: Air to Open (Anti-clockwise)

Port B: Air to Close (Clockwise)

Stroke, Spring Return (SR)

Port A: Air to Open (Anti-clockwise, compressing springs)

Port B: Exhaust Port

Setting from factory: Fail Close (FC), clockwise closing. To change to Fail Open (FO): see separate instructions

Max number of springs, size 2 to 35

A Spring Kit consists of 4 outer + 4 inner springs located inside the piston racks. To adjust for different Air Pressure; reduce the number of springs.

Max number of springs, size 250 & 400

The precompressed Spring Kits is located inside the piston racks and consists of 6 outer + 6 inner springs for size 250 and 8 outer + 8 inner springs for size 400. To adjust for different Air Pressure; reduce the number of springs.

Drive shaft

Stardrive shaft tailored to international standard for square-section shafts

Standard Connections

Solenoid valves – Namur

Fitting accessories – ISO 5211, DIN 3337, Namur

Stardrive shaft – ISO 5211 (90°), DIN 79 (45°), Namur

Lubricants, recommended

Springs and piston rack segments: Statoil Molyway LI 712 or similar

O-rings and plastic parts: Statoil Uniway LIX 42PA or similar

Standards and Certificates


The Actuators are designed to and in compliance with several different standards. They also have different types of certificates, see separate information.

End Caps, size 250 & 400

If conversion from DA to SR, or opposite, the End Caps must be changed (different for DA vs. SR).

Pneumatic Actuator Type 1, Metric Size 2, 4, 8, 12, 20 and 35

- Double acting (DA) and Spring Return (SR)
- Single End Stop Adjustment, open position

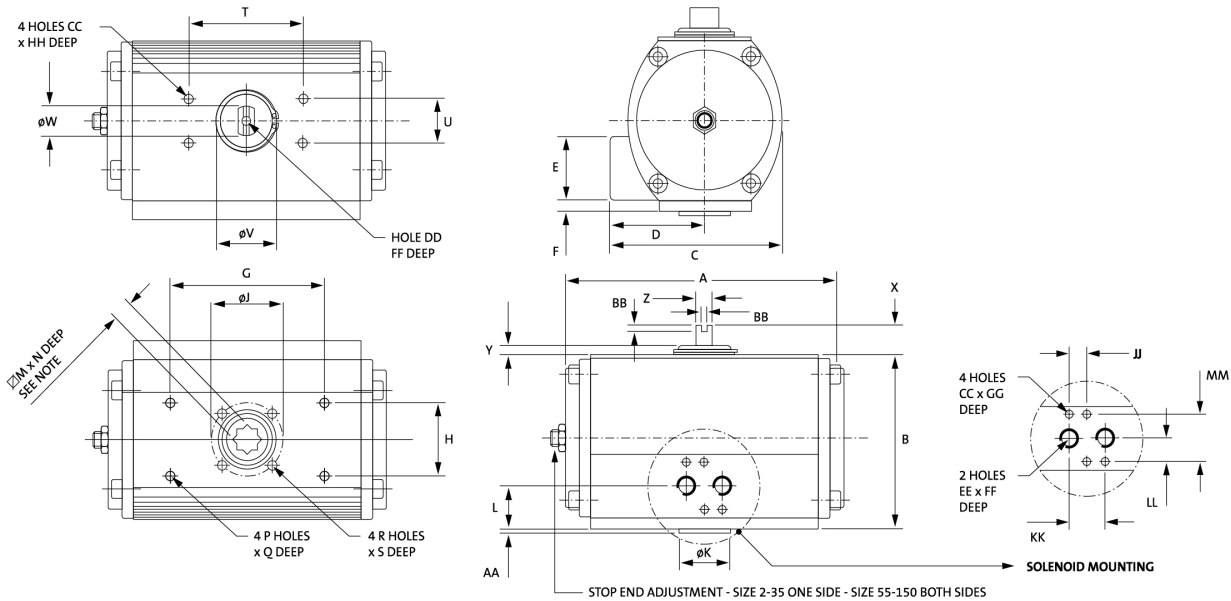

DIMENSIONS, METRIC (mm)

Actuator size	ISO	A	B	C	D	E	F	G	H	ØJ	ØK	L	M	N	P	Q	R	S	T
WM2	F03	114,5	73,0	75,5	43,5	41,0	---	73,0	32,0	36,0	25,0	20,5	9,0	10,0	M5	8,0	M5	8,0	80,0
WM2	F04	114,5	73,0	75,5	43,5	41,0	---	73,0	32,0	42,0	25,0	20,5	11,0	10,0	M5	8,0	M5	8,0	80,0
WM4	F04	133,0	90,5	87,5	47,5	41,0	---	73,0	32,0	42,0	30,0	20,5	11,0	12,0	M5	8,0	M5	8,0	80,0
WM4	F05	133,0	90,5	87,5	47,5	41,0	---	73,0	32,0	50,0	30,0	20,5	11,0	12,0	M5	8,0	M5	8,0	80,0
WM4	F05	133,0	90,5	87,5	47,5	41,0	---	73,0	32,0	50,0	30,0	20,5	14,0	12,0	M5	8,0	M5	8,0	80,0
WM8	F05/F07	162,0	109,0	105,0	57,0	42,0	7,5	73,0	32,0	50,0	35,0	28,5	14,0	16,0	M6	10,0	M6	10,0	80,0
WM12	F05/F07	194,0	118,5	121,0	67,0	43,0	8,0	107,0	49,0	50,0	35,0	29,5	14,0	16,0	M6	10,0	M6	10,0	80,0
WM12	F05/F07	194,0	118,5	121,0	67,0	43,0	8,0	107,0	49,0	50,0	35,0	29,5	17,0	16,0	M6	10,0	M6	10,0	80,0
WM20	F07/F10	218,0	140,5	136,5	72,0	43,0	8,0	107,0	49,0	70,0	55,0	29,5	17,0	19,0	M6	10,0	M8	13,0	80,0
WM35	F07/F10	266,0	166,5	156,0	78,0	43,0	8,5	161,0	73,0	102,0	70,0	30,0	22,0	24,0	M6	12,0	M10	16,0	80,0

Actuator size	ISO	U	ØV	ØW	X	Y	Z	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM
WM2	F03	30,0	25,0	16,0	20,0	4,5	11,5	2,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM2	F04	30,0	25,0	16,0	20,0	4,5	11,5	2,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM4	F04	30,0	31,0	20,0	20,0	4,5	11,5	2,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM4	F05	30,0	31,0	20,0	20,0	4,5	11,5	2,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM4	F05	30,0	31,0	20,0	20,0	4,5	11,5	2,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM8	F05	30,0	35,0	20,0	20,0	5,0	11,5	3,0	4,0	M5	M6	G1/8"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM12	F05/F07	30,0	45,0	20,0	20,0	5,5	11,5	3,0	4,0	M5	M6	G1/4"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM12	F05/F07	30,0	45,0	20,0	20,0	5,5	11,5	3,0	4,0	M5	M6	G1/4"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM20	F07/F10	30,0	50,0	32,0	20,0	6,5	19,0	3,0	4,0	M5	M6	G1/4"	12,0	8,0	5,0	12,0	24,0	16,0	32,0
WM35	F07/F10	30,0	61,0	32,0	20,0	7,0	19,0	3,0	4,0	M5	M6	G1/4"	12,0	8,0	5,0	12,0	24,0	16,0	32,0



Pneumatic Actuator Type 1, Metric
Size 2, 4, 8, 12, 20 and 35


TORQUE

Actuator Size	Air Supply	DA Torque	SR Torque (Nm)				
	BAR	Nm	Air - Start	Air - End	Spring - Start	Spring - End	Spring Qty
WM2	6	20	13	7	13	7	4+4
WM4	6	41	27	15	26	14	4+4
WM8	6	90	58	32	57	31	4+4
WM12	6	122	79	44	78	43	4+3
WM20	6	202	130	71	130	71	4+4
WM35	6	374	241	133	241	132	4+4

OPERATING DETAILS

Actuator Size	Operating time (sec)				Air consumption (litre)		Overall weight (kg)	
	DA Open	DA Close	SR Open	SR Close	Open	Close	DA	SR
WM2	<1	<1	<1	<1	0,09	0,12	1,0	1,1
WM4	<1	<1	<1	<1	0,18	0,24	1,8	1,9
WM8	<1	<1	<1	<1	0,34	0,41	3,1	3,4
WM12	1,5	1,5	1,5	1,0	0,49	0,64	4,1	4,7
WM20	2,0	2,0	2,0	1,5	0,90	1,00	6,3	7,0
WM35	2,5	2,5	2,5	2,0	1,69	1,90	10,5	12,0

Actuator Type 1, Features and Benefits

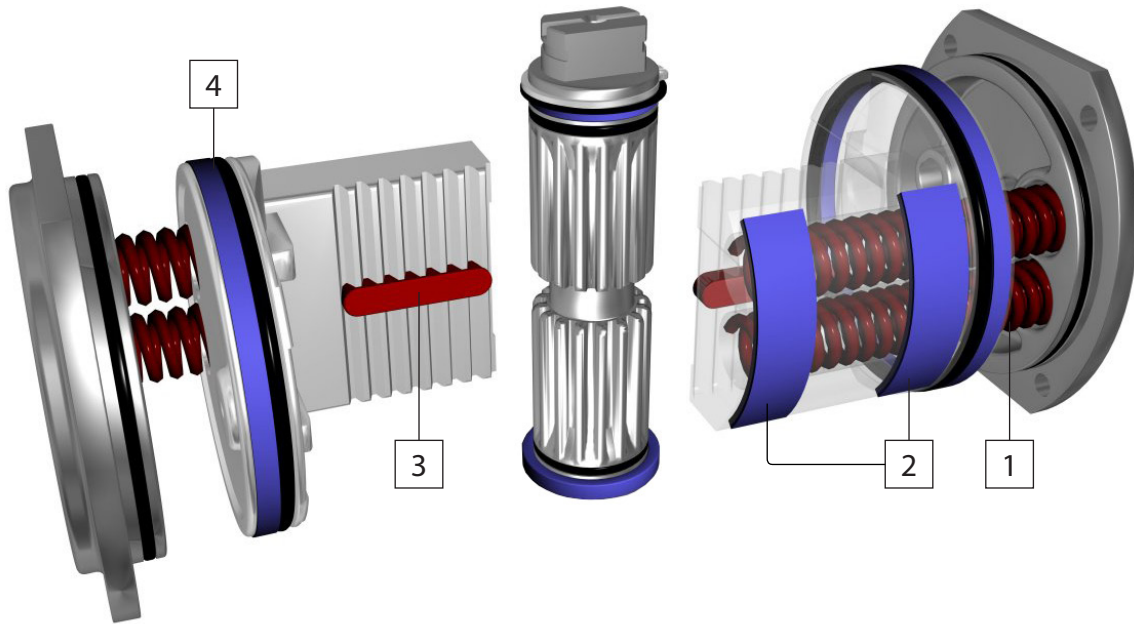

1. SPRINGS

- Springs are located inside the piston rack, same overall dimensions for DA and SR actuators.
- No special tools required to change from DA to SR or opposite.
- Long bolting is standard feature to fully relax springs.

2. PISTON WEAR PADS

- Dual encapsulated “POM” wear pads on the piston, prevent metal to metal contact between piston and cylinder, thus providing low friction travel.
- The dual encapsulated “POM” wear pads absorb the adverse side loading at start of each stroke.

3. TWIN GUIDE BARS

- Twin guide bars absorbs any adverse side loading, from rack at the start of each stroke, which reduces pinion & rack wear.

4. BACK UP BEARING

- Piston back up bearings, which are situated behind the pistons “o” ring, ensure linear movement and prevent wear on the cylinder surface.